









QUICK SPECS

Scan code for full specifications.

TORQUE RANGE

150 - 36,200 ft.-lbs. / 203 - 49051 Nm

WEIGHT (WITH POWERHEAD)

2.80 - 46.71 lbs. / 1.27 - 21.23 kg

HEIGHT

3.42 - 10.95 in. / 87 - 278 mm

LENGTH

4.23 - 13.89 in. / 107 - 353 mm


VERSA®

Hydraulic Torque Wrench

For low clearance jobs that require high torque values and repeatable results, **VERSA** is the ideal tool. The 3-moving-part design reduces the number of potential repairs and helps keep operating costs down. **VERSA**'s convenient 360° uniswivel allows for the safe and easy positioning of hoses. It's the most economical solution for your bolting needs and has a continuous profile design throughout the powerhead and hex link.

- SIMPLE OPERATION
- SLIM PROFILE
- 360° CONVENIENT UNISWIVEL
- SUBSEA SAFE

FULL SPECIFICATIONS

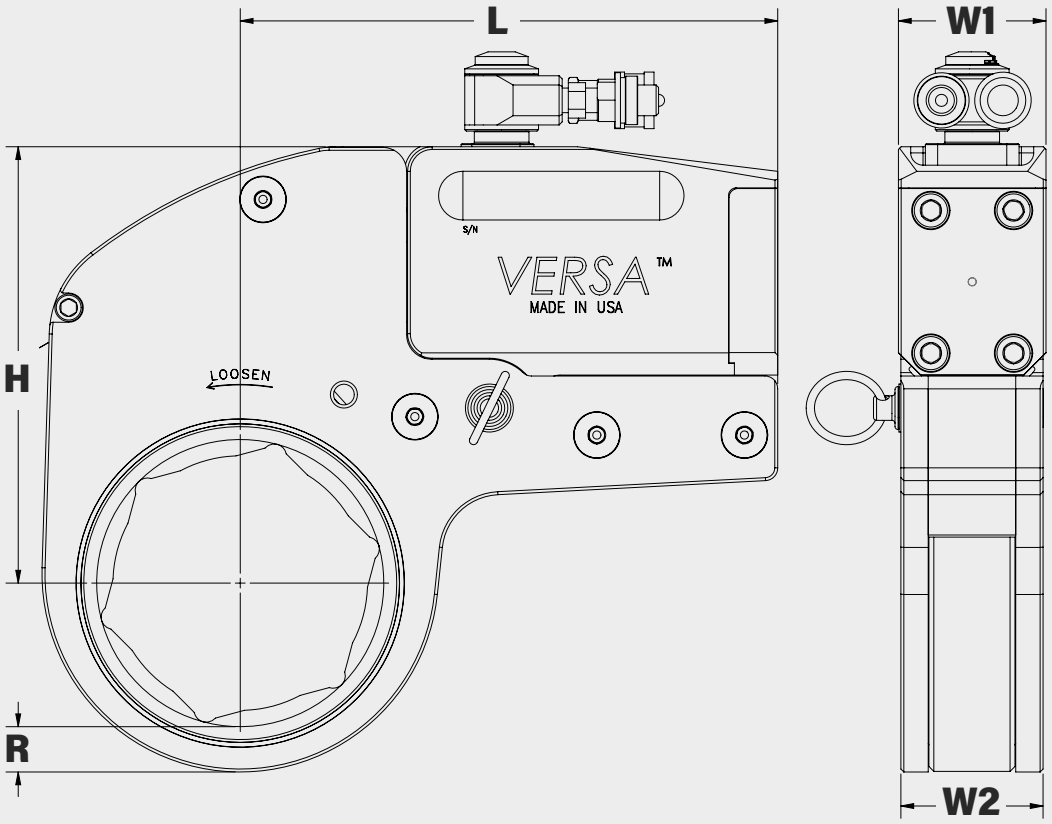

LEGEND: **H =** HEIGHT **W1 =** WIDTH OF POWERHEAD **W2 =** WIDTH OF LINK **L =** LENGTH **R =** DISTANCE FROM HEX CORNER

MODEL NUMBER	H	W1	W2	L	R	WEIGHT	TORQUE	
IMPERIAL	in.					lbs.	ft-lbs (Min)	ft-lbs (Max)
VERSA - 1	3.42	1.06	0.94	4.23	0.32	2.80	150	1,050
VERSA - 2	3.73	1.25	1.13	5.35	0.38	3.25	261	1,920
VERSA - 4	5.52	1.67	1.51	7.07	0.51	7.35	654	4,503
VERSA - 8	6.53	2.10	1.89	8.60	0.64	11.85	1,350	9,000
VERSA - 14	8.03	2.50	2.36	10.52	0.73	19.25	2,148	14,832
VERSA - 20	8.87	3.00	2.89	10.93	0.92	24.43	3,088	21,458
VERSA - 30	10.95	3.75	3.00	13.89	1.00	46.71	5,100	36,200

METRIC	mm					kg	Nm (Min)	Nm (Max)
VERSA - 1	87	27	24	107	8	1.27	203	1423
VERSA - 2	95	32	29	136	10	1.48	354	2602
VERSA - 4	140	42	38	180	13	3.34	886	6102
VERSA - 8	166	53	48	218	16	5.39	1829	12195
VERSA - 14	204	64	60	267	19	8.75	2911	20098
VERSA - 20	225	76	73	278	23	11.10	4184	29076
VERSA - 30	278	95	76	353	25	21.23	6911	49051

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2023 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.