




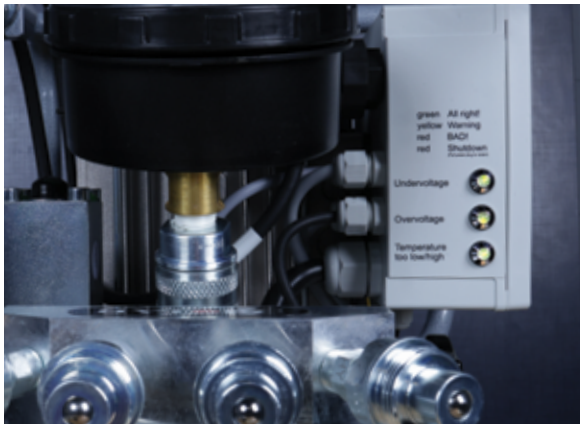

QUICK SPECS

Scan code for full specifications.

POWER

HY-115: 1.5 kW / 2.1 HP
HY-230: 1.5kW / 2.0HP - 7A
HY-400: 1.8kW / 2.4HP - 6A

WEIGHT

60 lbs / 27 kg

STAGES


4


HY-Series Pumps

The **HY-Series Electric Hydraulic Pumps** (HY-115, HY-230, HY-400) offer exceptional versatility, accommodating multiple voltage inputs (115V, 230V, and 400V respectively) to suit various power sources and operational environments. Engineered for high performance, they provide reliable hydraulic power for torque tools and equipment that demand robust force. Their user-friendly controls and straightforward operation and controls make them easy to manage and they operate quietly at ~80 dB. Built with durable materials and robust engineering, the HY-Series pumps ensure long-lasting reliability in demanding conditions, making them an ideal choice for many industrial applications.

- SIMPLE & MANUAL OPERATION
- VERSATILE
- ECONOMICAL

FULL SPECIFICATIONS

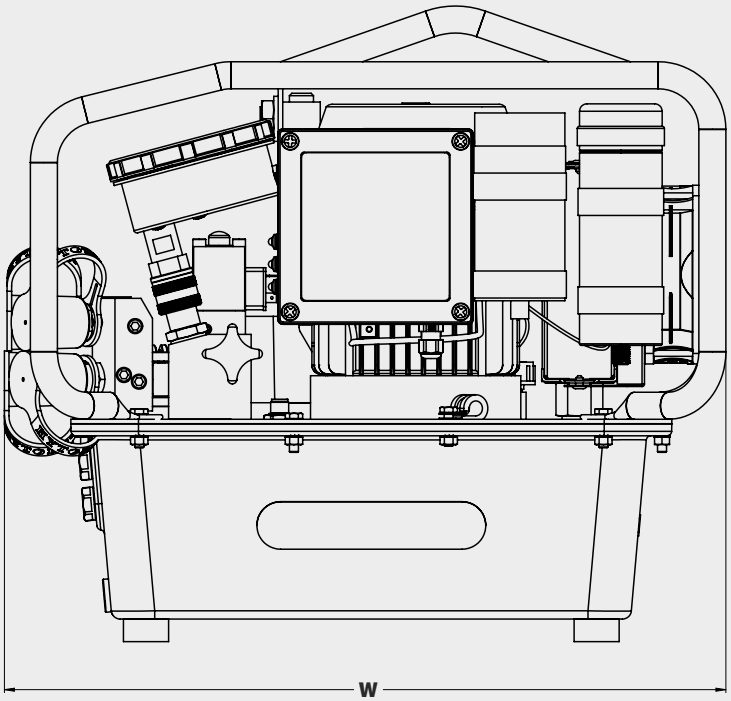

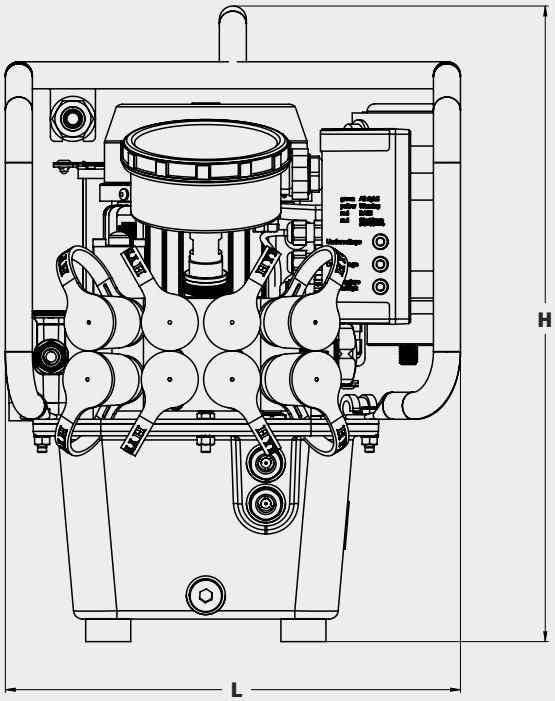

LEGEND: **L** = LENGTH **H** = HEIGHT **W** = WIDTH

SPECIFICATIONS AND FEATURES

Gauge	0-10 k PSI (+/-1% Accuracy)		
Stages	4		
Hour Meter	Optional		
Remote Control Length(s) Available	15ft (5m), 30ft (10m), 50ft (15m), 65ft (20m), 98ft (30m), 164ft (50m)		
Oil Cooler	Yes		
Number of Tools (Ports)	1 or 4		
	HY-115	**HY-230**	**HY-400**
Power	1.6kW/2.2Hp - 15A	1.5kW/2.0HP - 7A	1.8kW/2.4HP - 6A
Grid Requirement	1Ph 90-125V / 60Hz (75-115V available)	1Ph 200-230V - 50Hz/60z	3Ph 380-460V - 50Hz+60Hz
Reservoir Capacity	2.1 Gal (8L)	2.1 Gal (8L)	1.37 Gal (5.2L)
Width	18.9" (480 mm)	18.9" (480 mm)	18.9" (480 mm)
Length	11.9" (303 mm)	11.9" (303 mm)	11.9" (303 mm)
Height	16.7" (423 mm)	16.7" (423 mm)	16.7" (423 mm)
Weight	60 lbs (27 kg)	60 lbs (27 kg)	60 lbs (27 kg)

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2026 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.