







QUICK SPECS

Scan code for full specifications.

TORQUE RANGE

25 - 8,000 ft.-lbs. / 34 - 10847 Nm

WEIGHT (WITH BATTERY)

9.5 - 27 lbs. / 4.3 - 12.2 kg

SQUARE DRIVE

1/2 - 1-1/2 in.

LENGTH

9.9 - 16 in. / 251 mm - 406 mm

LITHIUM SERIES® II

Electric Torque Tool

The **LITHIUM SERIES II** (LST) is the most advanced electric torque tool available, designed from the ground up with expanded functionality, greater durability, and more intuitive usability. This powerful 36V battery-powered tool, with capacity up to 8,000 ft.-lbs. (10847 Nm), is the ultimate solution for strength and portability in industrial bolting jobs worldwide. This tool is compatible with conventional sockets, the HYTORC Washer, the HYTORC Nut, and works with the HYTORC Connect App.

- AWARD-WINNING
- 4 USER LEVELS
- DURABLE
- EASY TO USE

TESTIMONIAL

"I HAVE BEEN AROUND PLENTY OF BOLTING TOOLS, SEEN MANY TOOLS USED. BUT THIS IS REALLY COOL! IT'S LIGHTER THAN I EXPECTED, IT'S REALLY FOOL PROOF, AND SO SIMPLE THAT ANYONE CAN GET THE JOB DONE. THE GUYS ARE GOING TO BE ABLE TO WORK LONGER AND SAFER, WHILE STILL GETTING THE JOB DONE RIGHT. I LOVE IT!"

Kyle Chambers
Texas Quality Assurance



3-IN-1 FUNCTIONALITY

Can be used with the HYTORC Washer, HYTORC Nut, and standard reaction arm.



TORCSENSE™ TECHNOLOGY

Using **Torcsense™ Technology**, this battery-operated torque gun directly measures torque, helping to improve bolting performance.



RUNDOWN & TORQUE

With both Rundown and Torque modes, the **LITHIUM SERIES II Electric Torque Tool** can quickly get nuts snug before delivering high torque to tighten bolts to your specifications.







THE MOST AWARD-WINNING ELECTRIC TORQUE MULTIPLIER

PRO TOOL INNOVATION AWARD 2019


This award honors the LITHIUM SERIES II Tool as the very best and brightest industrial power tool available.

GOOD DESIGN AWARD 2019

This award honors the LITHIUM SERIES II Tool as the leader in design with innovation that has pushed the envelope in the world marketplace.

SPOTLIGHT ON NEW TECHNOLOGY 2019

This award recognizes the LITHIUM SERIES II Tool as a new and innovative technology that will make a major impact in the oil and gas industry.

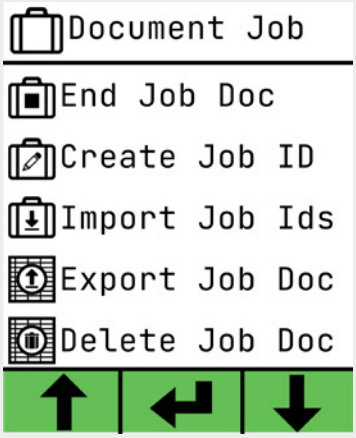

DATA CAPTURE & DOCUMENTATION

Once a job is completed the LST can send documentation to a PC using a USB cable or via Bluetooth* (with a compatible app).


*Select models.

COMPATIBLE SOFTWARE

Our award-winning **HYTORC Connect App** provides wireless data exchange between Bluetooth® enabled HYTORC Electric Torque Tools and Windows® PC or mobile devices.

For better quality control, the app maintains precise job data documentation by receiving detailed bolting results from the tool. The operator or supervisor can monitor job progress by viewing bolting results during and after the job.

FULL SPECIFICATIONS

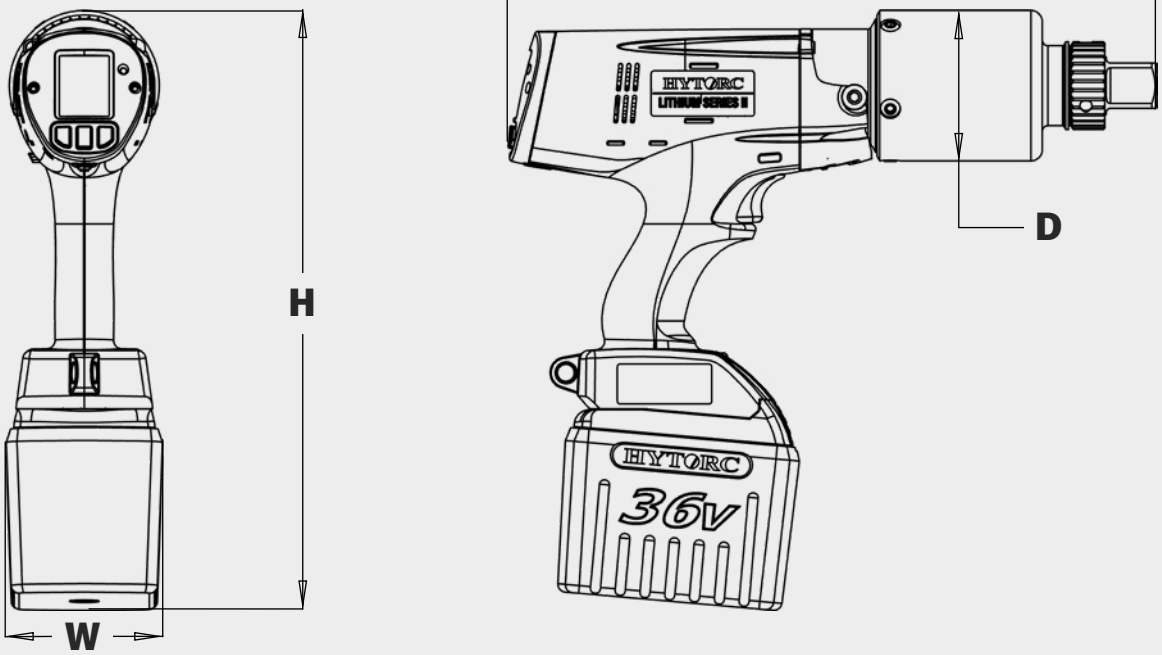

LEGEND: **H** = HEIGHT **W** = WIDTH **L** = LENGTH **D** = DIAMETER

CONFIGURATIONS	H	W	L	D	SQUARE DRIVE	WEIGHT*	SNUG		TORQUE	
IMPERIAL	in.					lbs.	ft-lbs (Min)	ft-lbs (Max)	ft-lbs (Min)	ft-lbs (Max)
LST-0250-HD	12.9	3.5	9.9	2.5	1/2	9.5	12	24	25	250
LST-0700-HD	12.9	3.5	11.4	2.6	3/4	11.7	35	149	150	700
LST-1200-HD	12.9	3.5	11.7	2.6	3/4	12.0	60	199	200	1,200
LST-2000-HD	13.2	3.5	13.9	3.2	1	16.6	100	324	325	2,000
LST-3000-HD	13.3	3.5	14.4	3.4	1	17.7	150	499	500	3,000
LST-5000-HD	13.6	4.0	15.4	4.0	1-1/2	22.4	200	799	800	5,000
LST-8000-HD	13.8	4.4	16	4.4	1-1/2	27	400	1,299	1,300	8,000

METRIC	mm				in.	kg			Nm (Min)	Nm (Max)
LST-0250-HD	328	89	251	64	1/2	4.3	16	33	34	339
LST-0700-HD	328	89	290	66	3/4	5.3	47	202	203	949
LST-1200-HD -HD	328	89	297	66	3/4	5.5	81	270	271	1627
LST-2000 -HD	335	89	353	81	1	7.5	136	439	441	2712
LST-3000-HD	338	89	366	86	1	8.0	203	677	678	4067
LST-5000-HD	346	102	391	102	1-1/2	10.2	271	1083	1085	6779
LST-8000-HD	351	112	406	112	1-1/2	12.2	542	1761	1763	10847

*with battery.

COMPLETE KIT CONTENTS

- LITHIUM SERIES II Tool
- Reaction Arm
- Storage Case
- 36V Battery Pack (2)
- Battery Charging System
- Side Handle
- Calibration Certificate
- Operations Manual

HYTORC owns all content, copyrights, trademarks and patents in this document. © 2024 HYTORC. Any unauthorized use or distribution of any material from this document is strictly prohibited.

HYTORC BALTICS

Contact:
info@hytorc.pro